

1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: LCP UL94V-0

Housing:LCP UL94V-0

端子: 磷青铜

Contact: Phosphor bronze

2-特性 (characteristics):

额定电压: 30V AC/DC .

Voltage Rating:30V AC/DC .

额定电流: 0.2 AMP AC/DC .

Raring Current:0.2 AMP AC/DC .

接触阻抗: 30mΩ MAX.

Contact Resistance:30mΩ MAX .

绝缘阻抗: 100MΩMIN.

Insulating Resistance:100MΩMIN.

耐电压: 200V AC/MINUTE

Withstanding Voltage:200V AC/MINUTE


温度范围: -25度至+85度

Temperture Range: -25°Cto +85°C

ORDERING INFORMATION

H 08-XX P X X

NO.OF PINS Per Row 02-11P	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP	PACKING A:PE Bag B:TUBE C:TRAY
SERIES NO 08:0.8mm	TYPE F=FEMALE M=MALE P=PIERCE	

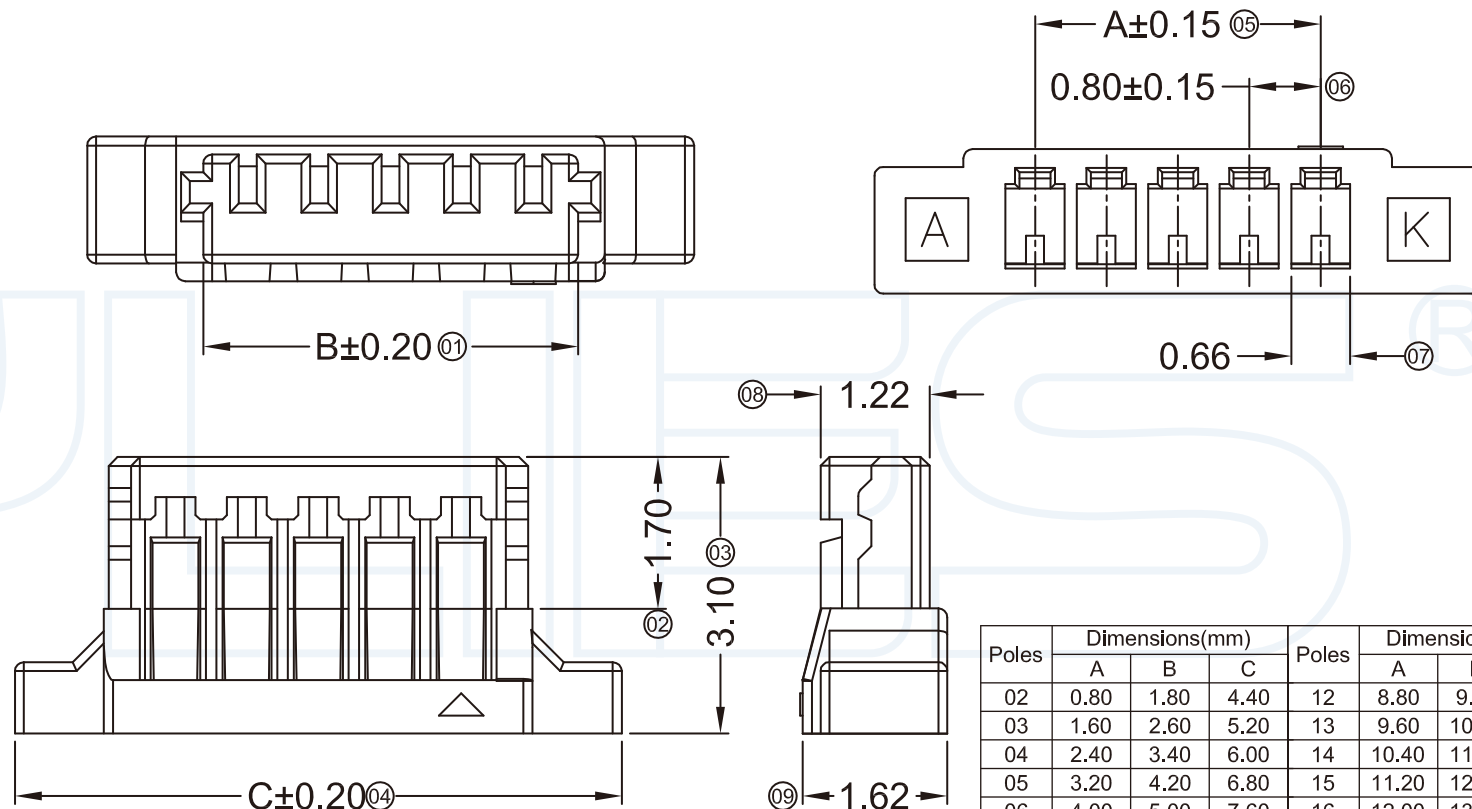

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	0.80	1.80	4.40	12	8.80	9.80	12.40
03	1.60	2.60	5.20	13	9.60	10.60	13.20
04	2.40	3.40	6.00	14	10.40	11.40	14.00
05	3.20	4.20	6.80	15	11.20	12.20	14.80
06	4.00	5.00	7.60	16	12.00	13.00	15.60
07	4.80	5.80	8.40	17	12.80	13.80	16.40
08	5.60	6.60	9.20	18	13.60	14.60	17.20
09	6.40	7.40	10.00	19	14.40	15.40	18.00
10	7.20	8.20	10.80	20	15.20	16.20	18.80
11	8.00	9.00	11.60	22	16.80	17.80	19.60

0800H-XXE-46	PA46 UL 94V-0	0800T	0800W
PART NO	Material	Suitable SWB Terminal	Mates With SWB Wafer

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON	REV	UNIT	SCALE	PAGE
	A	mm	1:1	1/1

TITLE

329-0.80mm 带耳胶壳

DATE

2018-02-18

PART NO:

H08-05PDA

DRAWING NO:

1 2 3 4 5 6 7 8 9